




Small 13.5 x 3.7 x 4 cm
200 grams

- 10/100/1000 Ethernet Interface to 8 ARINC Channels
 - 3 TX Variable Voltage, 1 RX/TX Shared, 4 RX
- **Advanced TX Testing Capabilities**
 - $\sim \pm 3.5 \pm 12$ Vpp Variable Voltage with ~ 50 mV Steps
 - 1 uSec Signal Generator
- **8-bit, 1 uSec A/D Signal Capture on Two RX Channels!**
- Thin-Server, Real-Time UDP Ethernet
- Auto RX Mode for ARINC->Ethernet Bridging
- IRIG-B RX Decode, PPS, Trigger, 2 Avionics & RS-485 Discretes
- 5-32 VDC Power – 2 Amp USB Power OK

**Alta's ENET-A429P Provides Ethernet to ARINC Connectivity
With Parametrics Testing**

Variable Voltage, Signal Generator and Signal Capture – The Most Advanced ARINC Testing

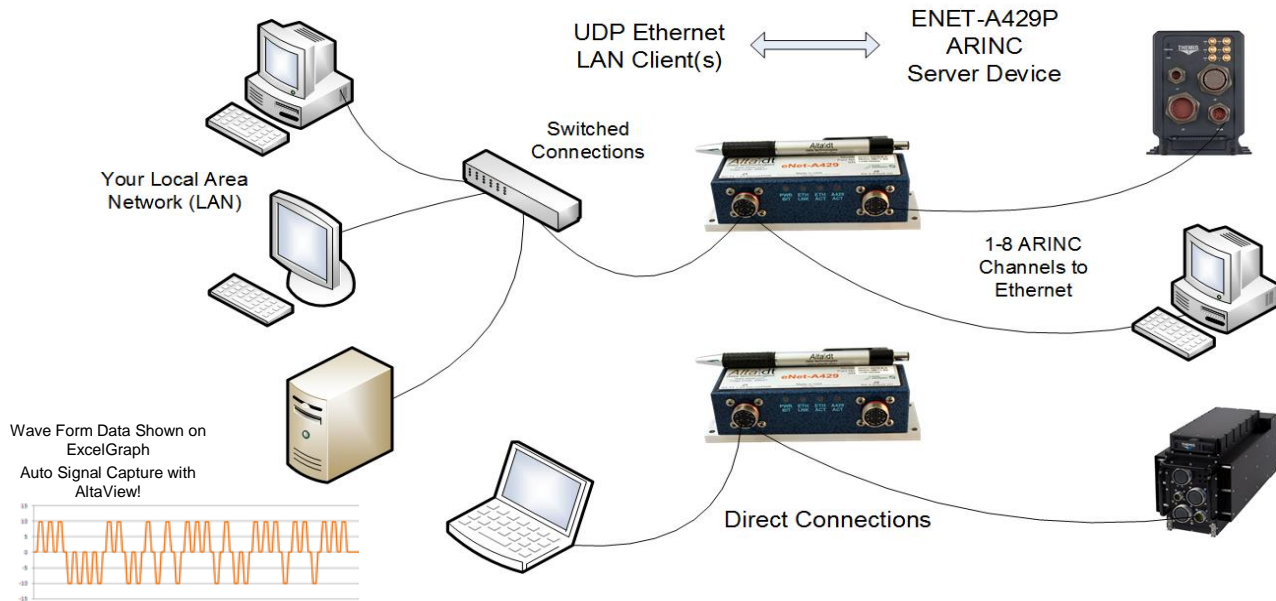

eNet-A429P™ is an innovative product that provides “remoting” of ARINC operations on 10/100/1000 Ethernet IP/UDP local area networks (LAN). eNet-A429P is a small, low-power, device ideal for details ARINC signal testing with **variable voltage control of the first 3 TX channels**. Alta has combined the industry’s most advanced 32-bit ARINC FPGA protocol engine, **AltaCore™**, with a real-time IP/UDP thin server. The customer can implement their application with the same feature-rich application programming interface, **AltaAPI™**, as used with standard cards – often without even recompiling - the ultimate in code portability.

****NOTE: eNet-A429P (server) is a real-time Ethernet/ARINC device, but your computers’ (client) IP stack may not be!** The eNet-A429 device provides real-time UDP receive and transmit requests to ARINC buffers, but the client’s IP/UDP stack will induce path delays as compared to backplane cards. For many applications (<100-1000 packets per second), this product will provide unparalleled flexibility in ARINC configurations (much better than USB devices). Contact Alta for test results on various OS and computer configurations – your system results may vary.

eNet-A429P™ Specifications

General

- 1 RX/TX Shared Channel; 4 RX Only
- 3 TX Channels with Variable
~±3.5-±12 Vpp Voltage with ~50 mV Steps
- TX 1 uSec Signal Generator
- 8-bit, 1 uSec A/D Signal Capture on RX Channels 4 & 5!
- Encode or Decode Almost any ARINC-429 Physical Layer Signal (512-200K Baud)

- 2 Avionics & 2 RS-485 Discretes
- One Bi-LVTTL Clock and One LVTTL Trigger
- 13.5 x 3.7 x 4cm, 200g without cabling
- Rugged, Mountable
- Support ARINC-429/575/573/717
- Standard 10/100/1000 Ethernet UDP
- 5-32 VDC Input Accepted (USB 2 Amp)
Power 1000E @ 40% Load: 700 mAmps
Power 100E @ 40% Load: 600 mAmps
- Glenair Mighty Mouse Connectors.
801-011-02M10-26PA/B Mates.
- One Megabyte RAM for Buffering
- Flash Disable Factory Setting for Secure Mem
- Parts Temp (C) : -55 to +120 Storage, 0 to +70
Commercial, -40 to + 85 Extended Temp
- Power-Up, Loop-Back and User BIT
- IRIG-B RX PAM and RX/TX PPS Time Sync
- IPC Level 3 and ISO 9001:2008 Processes

TX Features

- Simple or Detailed Frequency (Hz)
Control Per Label/Word List
- First 3 TX Channels Variable Voltage
 - ~±3.5-±12 Vpp, ~50 mV Steps
- ARINC-717 Frame Support
- Interrupts, External Trigger
- Full Error Injection
- Unique 1 uSec Signal Generator
to Test Any Digital Patterns

RX Features – Three Buffering Modes

- Channel Level Label/Word Tables
- Channel Level Current Value Tables
- Multi-Channel Data Tables for All Channels
- ARINC 717 Frame Support
- 64-Bit, 20 nSec Time Tags, Interrupts, Trigger
- Full Error Detection

Playback (TX)

- Real Hardware Playback from Archive Files
- H/W Playback Timing to 20 uSec Accuracy

Software: *AltaAPI & AltaView*

- Multi-Layer *AltaAPI* Architecture to Support Windows and C Linux, VxWorks, LabVIEW, etc...
 - Contact Factory For RTOS Platforms
- Optional *AltaView* is Based on the Latest Windows MS Office Interface Ribbon-Bar
 - Full Analyzer Integration Tool
 - Multi Language Support
 - “-A” Option at end of Part Number

Part Numbers

- **ENET-A429P-8**
 - 1 RX/TX Shared Channel; 4 RX Only
 - 3 TX Variable Voltage Channels

Options: Add -E for Ext Temp Parts (-40 to +85C).
Add -A for AltaView Analyzer, -N For NVRAM Write Disable.
Example: ENET-A429P-8-AEN.

NOTE: On shared channels: TX lines have an extra RX load;
when powered-off, RX channels can have severe voltage drain
– use only dedicated RX channels for critical systems.

Optional Cables:

- **ENETCAB-J1-01**
 - First 4 Channels (All TX and 1 Shared RX/TX Channel), Ethernet & USB Power
- **ENETCAB-J2-01**
 - 4 ARINC RX Only and
Auxiliary Mini DB-26

5 Year Limited Warranty

EU and China RoHS Compliant

Contact Alta for Special Lead Build Configurations
Non-Public Telcom/CE Device

Alta Data Technologies LLC
4901 Rockaway Blvd., Building A
Rio Rancho, NM 87124 USA
www.altadt.com
alta.sales@altadt.com
888-429-1553 or 505-994-3111